

# Data Sheet for Precision Resistor

Power Resistor (wirewound)

Series UT



- Power ratings up to 10 Watts
- Stable pulse handling
- Resistance tolerances  $\pm 0,01\%$ ..10%
- TCR up to  $\pm 20$  ppm/°C
- Non-inductive windings (option)
- Resistance values from  $0,01\Omega$ ..260k $\Omega$
- Option high temperature range -55°C..350°C
- Option 4 pin (Kelvin) connection

Electrical Specification	UT						
	1/2A	1A*	2A*	3	5*	7	10*
Resistance range from 0,01 $\Omega$ ..	..2,5k $\Omega$	..10k $\Omega$	..22k $\Omega$	..45k $\Omega$	..91k $\Omega$	..150k $\Omega$	..260k $\Omega$
Resistance tolerance	$\pm 0,01\%$ .. $\pm 10\%$						
Power rating standard (0W @ +275°C)	0,4W	1W	2,5W	4W	5W	7W	10W
Power rating HT version (0W @ +350°C)	0,5W	1,5W	3W	5,5W	6,5W	9W	13W
Max. working voltage	20V	52V	130V	210V	360V	650V	850V
TCR-rate	$\pm 20$ ppm/°C @ R > 10 $\Omega$ $\pm 50$ ppm/°C @ R = 1 $\Omega$ ..10 $\Omega$ $\pm 90$ ppm/°C @ R < 10 $\Omega$						
Working temperature range (max.)	-55..+275°C standard / -55..+350°C HT version						
*MIL-R-26 / MIL-R-39007	--	RW-70	RW-69	--	RW-74	--	RW-78

Mechanical Specification	
Resistance technology / material	Wirewound / wire alloy
Housing material	Inorganic Silicone
Connections	Axial cooper tinned

Parameters	Test Conditions (MIL-STD 202)	Specification	
		$\Delta R$ Standard	$\Delta R$ HT version
Dielectric	See norm	$\pm 0,2\%$ +0,05 $\Omega$	$\pm 0,2\%$ +0,05 $\Omega$
Load life	See norm	$\pm 1\%$ +0,05 $\Omega$	$\pm 3\%$ +0,05 $\Omega$
Storage	See norm	$\pm 0,2\%$ +0,05 $\Omega$	$\pm 2\%$ +0,05 $\Omega$
Moisture resistance	See norm	$\pm 0,2\%$ +0,05 $\Omega$	$\pm 2\%$ +0,05 $\Omega$
Thermal shock	See norm	$\pm 0,2\%$ +0,05 $\Omega$	$\pm 2\%$ +0,05 $\Omega$
5X Overload ( 5s )	See norm	$\pm 0,2\%$ +0,05 $\Omega$	$\pm 2\%$ +0,05 $\Omega$
Shock	See norm	$\pm 0,1\%$ + 0,05 $\Omega$	$\pm 0,2\%$ + 0,05 $\Omega$
Vibration	See norm	$\pm 0,1\%$ + 0,05 $\Omega$	$\pm 0,2\%$ + 0,05 $\Omega$


Dielectric strength: 1000 VAC (500 VAC @ UT-1/2A, UT-1A)

# Data Sheet for Precision Resistor


Power Resistor (wirewound)

Series UT

## Power Derating Curve

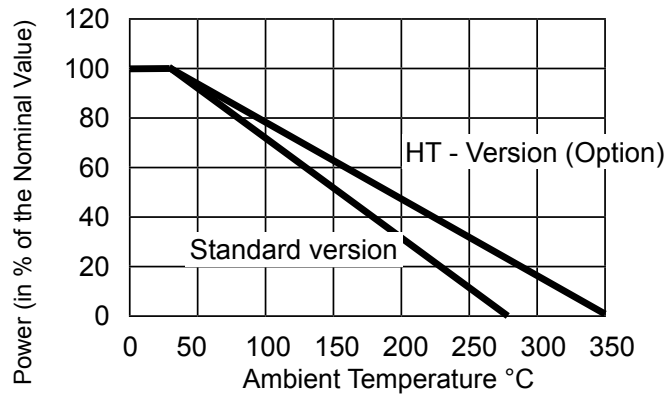

## Technical Drawing

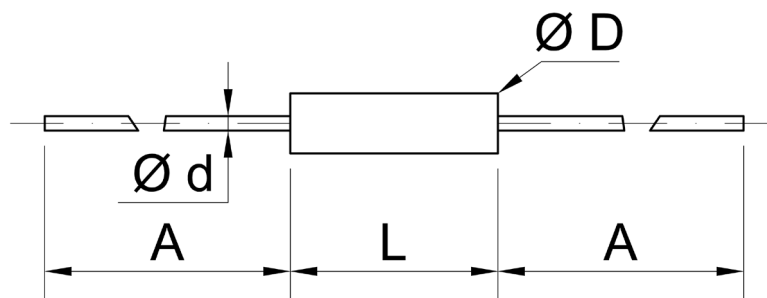

UT	A (min.)	L ( $\pm 1,6$ )	$\varnothing D$ ( $\pm 0,8$ )	d ( $\pm 0,05$ )
1/2A	25,4	6,4	2,4	0,5
1A	25,4	10,3	2,4	0,5
2A	25,4	12,7	4,7	0,8
3	25,4	17,1	6,9	1,0
5	25,4	22,2	7,9	1,0
7	25,4	35,0	9,5	1,0
10	25,4	45,2	9,5	1,0

Dimensions in mm

# Data Sheet for Precision Resistor

Power Resistor (wirewound)

Series UT

Order code						
Description		Selection: standard=black/bold, possible options=grey/cursive				
Series:	<b>UT</b>					
Type / size:						
1/2A (max. 2,5kΩ)		<b>1/2A</b>				
1A (max. 10kΩ)		<b>1A</b>				
2A (max. 22kΩ)		<b>2A</b>				
3 (max. 45kΩ)		<b>3</b>				
5 (max. 91kΩ)		<b>5</b>				
7 (max. 150kΩ)		<b>7</b>				
10 (max. 260kΩ)		<b>10</b>				
Resistance tolerance:						
±0,02%			<b>W0,02%</b>			
±0,05%			<b>W0,05%</b>			
±0,1%			<b>W0,1%</b>			
±0,25%			<b>W0,25%</b>			
±0,5%			<b>W0,5%</b>			
±1%			<b>W1%</b>			
±5			<b>W5%</b>			
±10%			<b>W10%</b>			
<i>Option ±0,01%</i>			<i>W0,01%</i>			
Temperature coefficient:						
±20ppm/°C @ R >10Ω				<b>TK20</b>		
±50ppm/°C @ R =1Ω..10Ω				<b>TK50</b>		
<i>Option ±90ppm/°C @ R &lt;1Ω</i>				<i>TK90</i>		
Resistance value - please choose:						
From 0,01Ω bis ≤ see type					<b>xxxxxxx</b>	
<i>Option non-inductive windings: max. resistance value / 2</i>						<i>N</i>
<i>Option high temperature version</i>						<i>HT</i>
<i>Option 4 pin (Kelvin) connection</i>						<i>K</i>

Order Example	Series	Type	Resistance tolerance	Temperature coefficient	Resistance value	Inductance	Temperature version	Connection
Choice	UT	3	±0,1%	20ppm/°C	10,1kΩ	Standard	Standard	Standard
Code	UT	3	W0,1%	TK20	10k100	-	-	-